
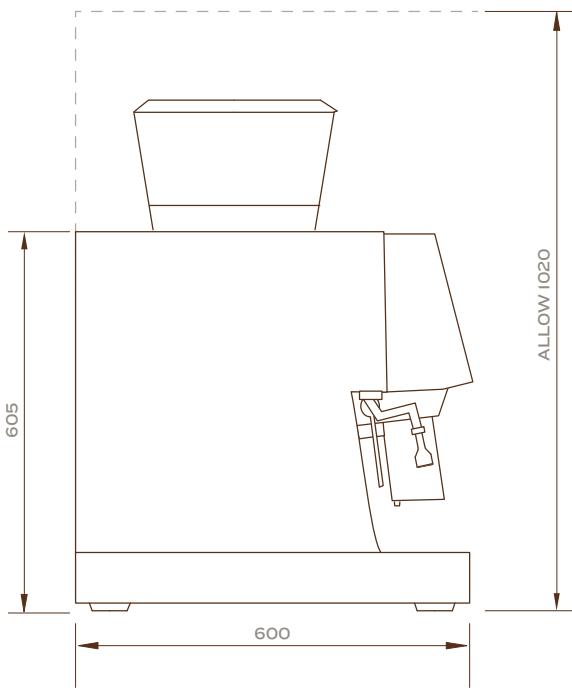
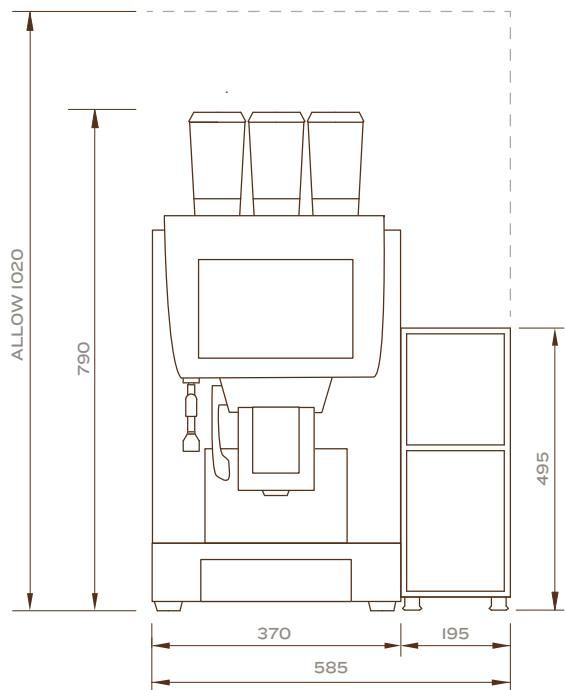
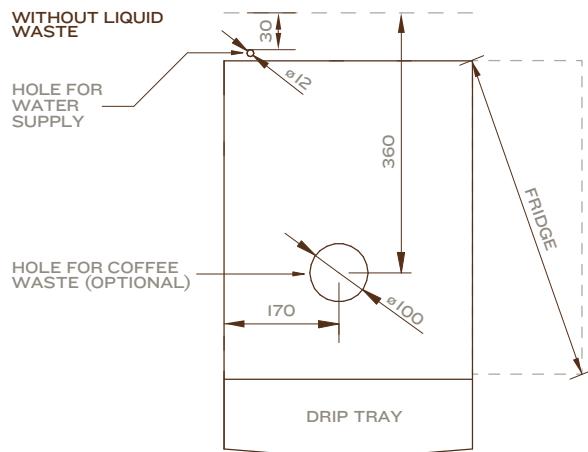


Leading the way in both design and functionality, with two bean hoppers to cover both caffeine and decaf demands.

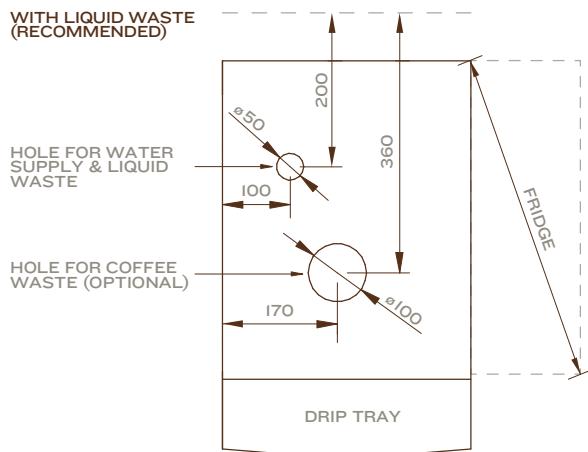

If the machine is to be installed within an alcove, recessed space, or enclosed cabinetry, different clearance and dimensional requirements apply. Please contact us prior to installation to confirm the correct measurements and clearance requirements for alcove installations.

POWER:	2 x 13 amp plugs above the counter top and within 1m of where machine is situated. Where a Brita IQ filter head is specified, an additional 13 amp plug socket will be required. The exact location will be confirmed following a site survey, as it is dependent on water supply and filter positioning.
WATER:	15mm copper terminating in a $\frac{3}{4}$ washing machine valve in cupboard below where machine will be situated.
WORKTOP:	50 mm hole 200mm from the back wall behind where the machine will be installed if you are installing liquid waste. If there is no liquid waste, the hole can be 12mm, 30mm from the back wall. This will connect the water pipe from the cupboard below to the back of the coffee machine. The Office Coffee Company will drill the hole when the coffee machine is in place only when the worktop is standard laminate or MDF - not Corian, marble, or stone.
WASTE:	32mm trapped vertical waste outlet in cupboard below (advised).