


One Touch Cold

INSTALLATION INFORMATION

Keep your employees hydrated and energised throughout the day with chilled, BRITA filtered water.

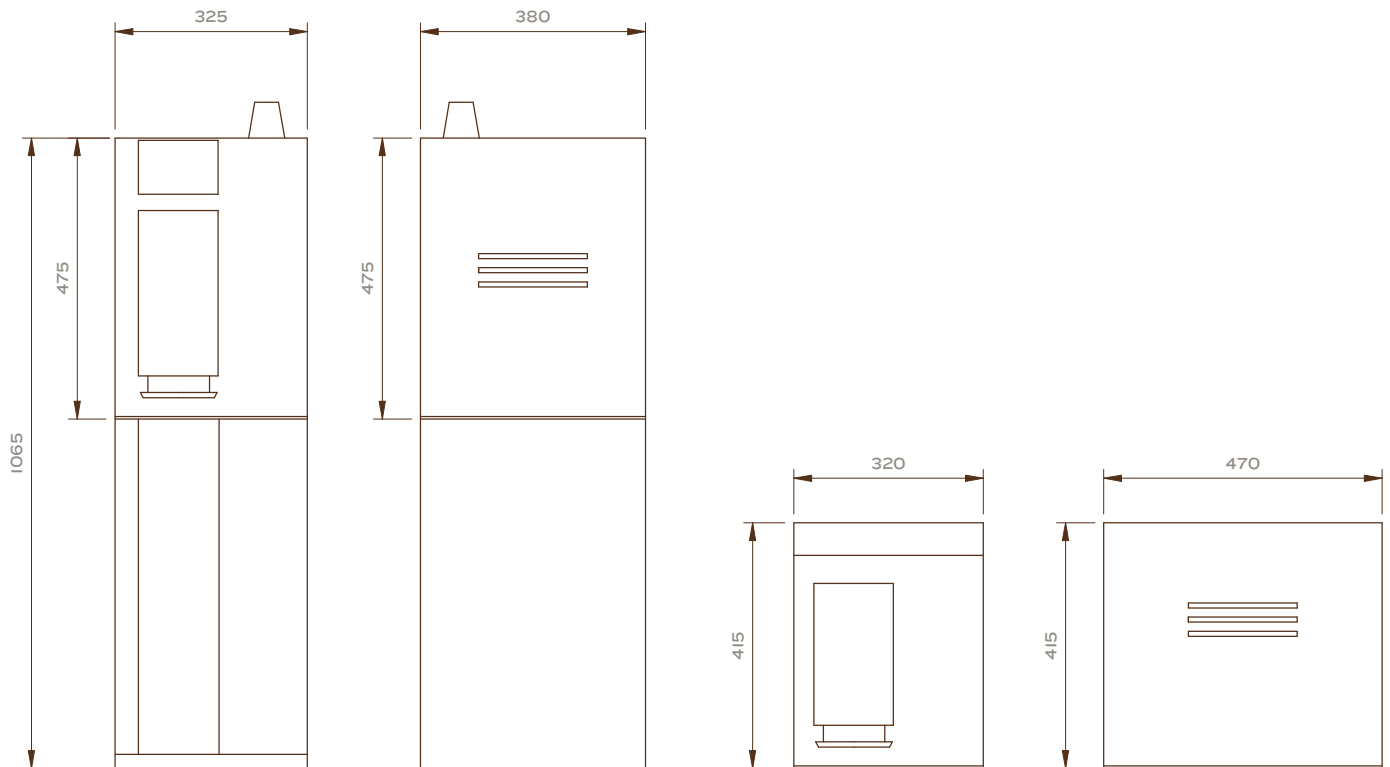

POWER:	1 x 13 amp plug within 1m of where machine is situated (and above the counter top for a counter-top cooler)
WATER:	Counter-top: 15mm copper terminating in a 3/4 washing machine valve in cupboard below where machine will be situated. Floor standing: 15mm copper terminating in a 3/4 washing machine valve behind where machine will be situated.
WORKTOP:	12mm hole 30mm from the back wall behind where the machine will be installed. This will connect the water pipe from the cupboard below to the back of the water cooler. The Office Coffee Company will drill the hole when the water cooler is in place only when the worktop is standard laminate or MDF – not Corian, marble, or stone. (Applies to counter-top only)